



RS RANGE FEATURING INTEGRATED DAYTIME RUNNING LIGHT

BA 7204






TECHNICAL SPECIFICATIONS

E-MARK	7.5	
VOLTAGE RANGE	9V-32V	
RAW LUMENS	3630 LM	
BEAM PATTERN	HYBRID	
OPTICAL EFFICIENCY	88%	
BEAM DISTANCE (0.25LX)	394 METRES	
# HIGH POWER LEDS	4+10 WATTS	
POWER CONSUMPTION	44 WATTS	
CURRENT DRAW**	3.1 AMPS	
LED LIFE	50.000 HOURS*	

*LED Manufacturers Specifications ** At 14 4 Volts

3630 LUMENS • DAYTIME RUNNING LIGHT • AUTO-DIMMING OF DRL ELECTRONIC THERMAL MANAGEMENT • ECE APPROVED • QUICK FIT TECHNOLOGY


ISOLUX PERFORMANCE





SIDE MOUNT

BOTTOM MOUNT






7260 LUMENS • DAYTIME RUNNING LIGHT • AUTO-DIMMING* OF DRL ELECTRONIC THERMAL MANAGEMENT • ECE APPROVED • QUICK FIT TECHNOLOGY

TECHNICAL SPECIFICATIONS

E-MARK	12.5	
VOLTAGE RANGE	9V-32V	
RAW LUMENS	7264 LM	
BEAM PATTERN	HYBRID	
OPTICAL EFFICIENCY	88%	
BEAM DISTANCE (0.25LX)	560 METRES	
# HIGH POWER LEDS	8+20 WATTS	
POWER CONSUMPTION	88 WATTS	
CURRENT DRAW**	6.2 AMPS	
LED LIFE	50.000 HOURS*	

LED Manufacturers Specifications ** At 14.4 Volts

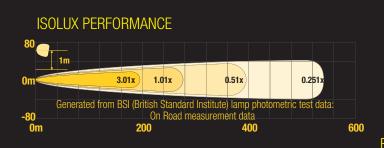

SIDE MOUNT

360

BOTTOM MOUNT

360

2

2

ST ONROAD LIGHT RANGE

BA 7202



3470 LUMENS • ELECTRONIC THERMAL MANAGEMENT • ECE APPROVED DESIGN AND INVENTION PATENTS • 9V-32V RANGE

TECHNICAL SPECIFICATIONS

E-MARK	7.5	
VOLTAGE RANGE	9V-32V	
RAW LUMENS	3472 LM	
BEAM PATTERN	HYBRID	
OPTICAL EFFICIENCY	88%	
BEAM DISTANCE (0.25LX)	394 METRES	
# HIGH POWER LEDS	4	
POWER CONSUMPTION	42 WATTS	
CURRENT DRAW**	3.0 AMPS	
LED LIFE	50.000 HOURS*	

*LED Manufacturers Specifications ** At 14.4 Volt


ISOLUX PERFORMANCE



SIDE MOUNT



BOTTOM MOUNT






TECHNICAL SPECIFICATIONS

E-MARK	12.5	
VOLTAGE RANGE	9V-32V	
RAW LUMENS	6944 LM	
BEAM PATTERN	HYBRID	
OPTICAL EFFICIENCY	88%	
BEAM DISTANCE (0.25LX)	560 METRES	
# HIGH POWER LEDS	8 WATTS	
POWER CONSUMPTION	86 WATTS	
CURRENT DRAW**	6.2 AMPS	
LED LIFE	50.000 HOURS*	


LED Manufacturers Specifications ** At 14.4 Volts

ISOLUX PERFORMANCE

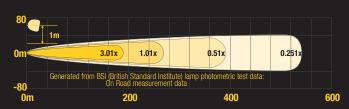

SIDE MOUNT

BOTTOM MOUNT

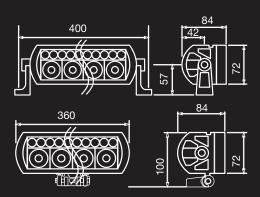


T OFF ROAD LIGHT RANGE

ISOLUX PERFORMANCE Senerated from BSI (British Standard Institute) lamp photometric test data: On Road measurement data On Road measurement data

BA 7201

20880 LUMENS • ELECTRONIC THERMAL MANAGEMENT TOUGH CONSTRUCTION • DESIGN AND INVENTION PATENTS 9V-32V RANGE

ISOLUX PERFORMANCE



BA 7206

9V-32V RANGE

20% INCREASE LED OUTPUT





ISULUX PERFURMANCE


Generated from BSI (British Standard Institute) lamp photometric test data:

On Road measurement data


On 200 400

20880 LUMENS • ELECTRONIC THERMAL MANAGEMENT OUTSTANDING PEFORMANCE FOR MOTORSPORT USE

SIDE MOUNT



BOTTOM MOUNT



TECHNICAL SPECIFICATIONS

TECHNICAL SPECIFICATIONS				
	BA 7200	BA 7201	BA 7206	
VOLTAGE RANGE	9V-32V	9V-32V	9V-32V	
RAW LUMENS	13888 LM	20830 LM	2080 LM	
BEAM PATTERN	HYBRID	HYBRID	HYBRID	
OPTICAL EFFICIENCY	88%	88%	88%	
BEAM DISTANCE (0.25LX)	792 METRES	897 METRES	305 METRES	
# HIGH POWER LEDS	16	24	2	
POWER CONSUMPTION	174 WATTS	260 WATTS	22 WATTS	
CURRENT DRAW**	12.4 AMPS	18.2 AMPS	1.5 AMPS	
LED LIFE	50.000 HOURS*	50.000 HOURS*	20.000 HOURS*	
WEIGHT	2400 GRAMS	3200 GRAMS	380 GRAMS	
DIM A (mm)	720	1040	160	
DIM B (mm)	680	1000	120	

GRILLE KITS

BA 7211

DEFENDER 2007 ON

UPPER GRILLE KIT INC. LIGHTS

(Suitable for Air Con vehicles with standard cooling pack (single fan))



BA 7212
DEFENDER 2007 ON
LOWER GRILLE KIT

(Suitable for Air Con vehicles with standard cooling pack (single fan))

BA 7213

DEFENDER 2007 ON

FENDER/SIDE GRILLE (SET OF 3)







ACCESSORIES

BA 7207 SIDE MOUNT KIT





BA 7208 TWO LAMP HARNESS KIT (RS RANGE)



BA 7209 TWO LAMP HARNESS KIT (ST RANGE)



BA 7210FOUR LAMP PICK HARNESS KIT



FOUNDED ON THE PRINCIPLES OF BRINGING WORLD CLASS TECHNOLOGY TO ITS CUSTOMERS, THE LAZER PRODUCTS COMBINE COMPETITION BEATING PERFORMANCE WITH AUTOMOTIVE QUALITY STANDARDS.

We are proud to manufacture in the United Kingdom, with facilities that have been established for more than ten years and specialising in LED and surface mount technology. Lazer is committed to meeting the needs of the global market, with customer service and product quality at the core of its business.

